



STEP 2

REMOVAL OF PLATE, TRIM EXCAVATION TEMPORARY SUPPORT, INSTALL DOWELS


QUICK SETTING MICRO
CONCRETE TO FIX COVER

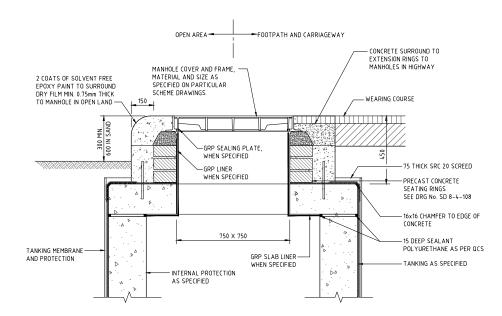


CONCRETE SUROUND TO MANHOLE CHAMBER ACCESS



BUILD UP PRECAST SEATING RINGS AND CONCRETE IN PLACE REMOVE DEBRIS FROM MANHOLE





STEP 4

LAYING OF CONCRETE SEALING

CONSTRUCTION SEQUENCE FOR THE INSTALLATION OF COVERS IN THE CARRIAGEWAY

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.
- ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE CURRENT Q.C.S. UNLESS OTHERWISE AGREED WITH THE ENGINEER.
- 3. FOR MANHOLE COVER INSCRIPTION DETAILS, REFER TO
- THERE SHALL BE A MINIMUM OF 1 AND MAXIMUM OF 4 PRECAST CONCRETE SEATING RINGS FOR EACH MANHOLE COVER. ADDITIONAL RINGS MAY BE INSTALLED SUBJECT TO THE APPROVAL OF THE ENGINEER.

3	APR 19	ISSUED FOR USE	
2	01 MAR 19	REVALIDATED ISSUE	
1	23NOV15	ISSUED FOR USE	
0	15SEP13	ISSUED FOR USE	
Rev.	Date	Revision Details	Appd.

هيئــة الأشـغــال العامـــة Public Works Authority

P.O.Box: 22188 Tel.: 00974 44950000 Fax: 00974 44950999

و thority المنافقة و المنافقة و

PROJECTS AFFAIRS

Section 8 - Drainage Works
Part 4 - Pipeline Installation

Drawing T

MANHOLE COVER INSTALLATION SEQUENCE

Approved:	Sheet No:	1	OF	1	
Date: APRIL 2019	Scale:	N.	TS		
Drawing Number:					Revision:
SD 8-4-1	2				